

505

 **Anselmi®** Istar





CARATTERISTICHE

Cerniera in zama e acetlica.

Regolabile sui tre assi.

Utilizzabile sia per **porte destre che sinistre**.

Certificazione IFT.

FEATURES

Zamak and acetal resin hinge.

3D adjustable.

Right and left doors applicable.

IFT certificated.

DATI TECNICI

Altezza	110 mm
Larghezza lato porta	24 mm
Larghezza lato telaio	24 mm
Angolo di apertura	180°
Certificazione IFT	

PORTATA

2X 	2 cerniere simmetriche (1 superiore e 1 inferiore)	40 Kg
3X 	3 cerniere asimmetriche (2 superiori e 1 inferiore)	60 Kg

IMBALLI

Commerciali	scatole da 2 pz
Industriali	scatole da 42 pz

FINITURA

(vedi pag. 53)

Galvanica	Ottone lucido
	Cromo lucido
Verniciatura a polvere	Cromo satinato
	Nickel satinato
	Bianco Ral 9016
	Nero

REGOLAZIONI

Altezza	+2,5 mm - 2,5 mm
Laterale	-1,5 mm +1,5 mm
Profondità	-1 mm +1 mm

FRESATURE

Diametro suggerito fresa	14 o 16 mm
Ghiera = diametro fresa	+11 mm

TECHNICAL DATA

Height	110 mm
Door width	24 mm
Frame width	24 mm
Opening angle	180°
IFT Certification	

LOAD CAPACITY

2X 	2 symmetrical hinges (1 upper and 1 lower)	40 Kg
3X 	3 asymmetrical hinges (2 upper and 1 lower)	60 Kg

PACKAGING

Commercial	box of 2 pcs
Industrial	box of 42 pcs

FINISHING

(see page 53)

Galvanic	Polished Brass
	Polished Chrome
Powder-coated	Satin Chrome
	Satin Nickel
	White Ral 9016
	Black

ADJUSTMENTS




Height	+2,5 mm - 2,5 mm
Side	-1,5 mm +1,5 mm
Depth	-1 mm +1 mm

MILLING

Cutter diameter	14 or 16 mm
Collar ring = cutter diameter	+ 11 mm

DIMENSIONI

DIMENSIONS

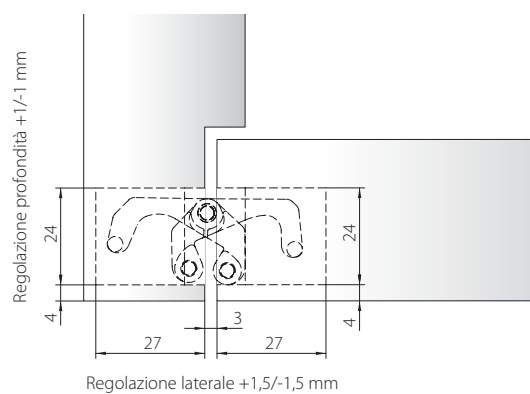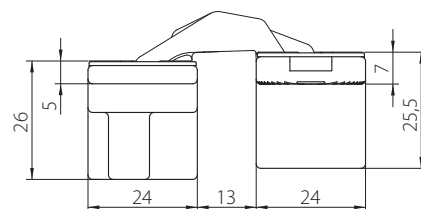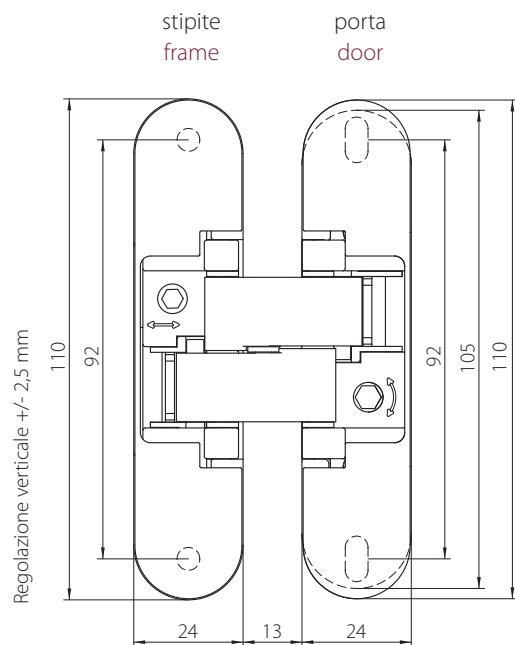

FRESATURE

MILLING

